


SC351

New standard for daily cleaning performance and maneuverability

- Next generation in daily small area scrubbing and drying



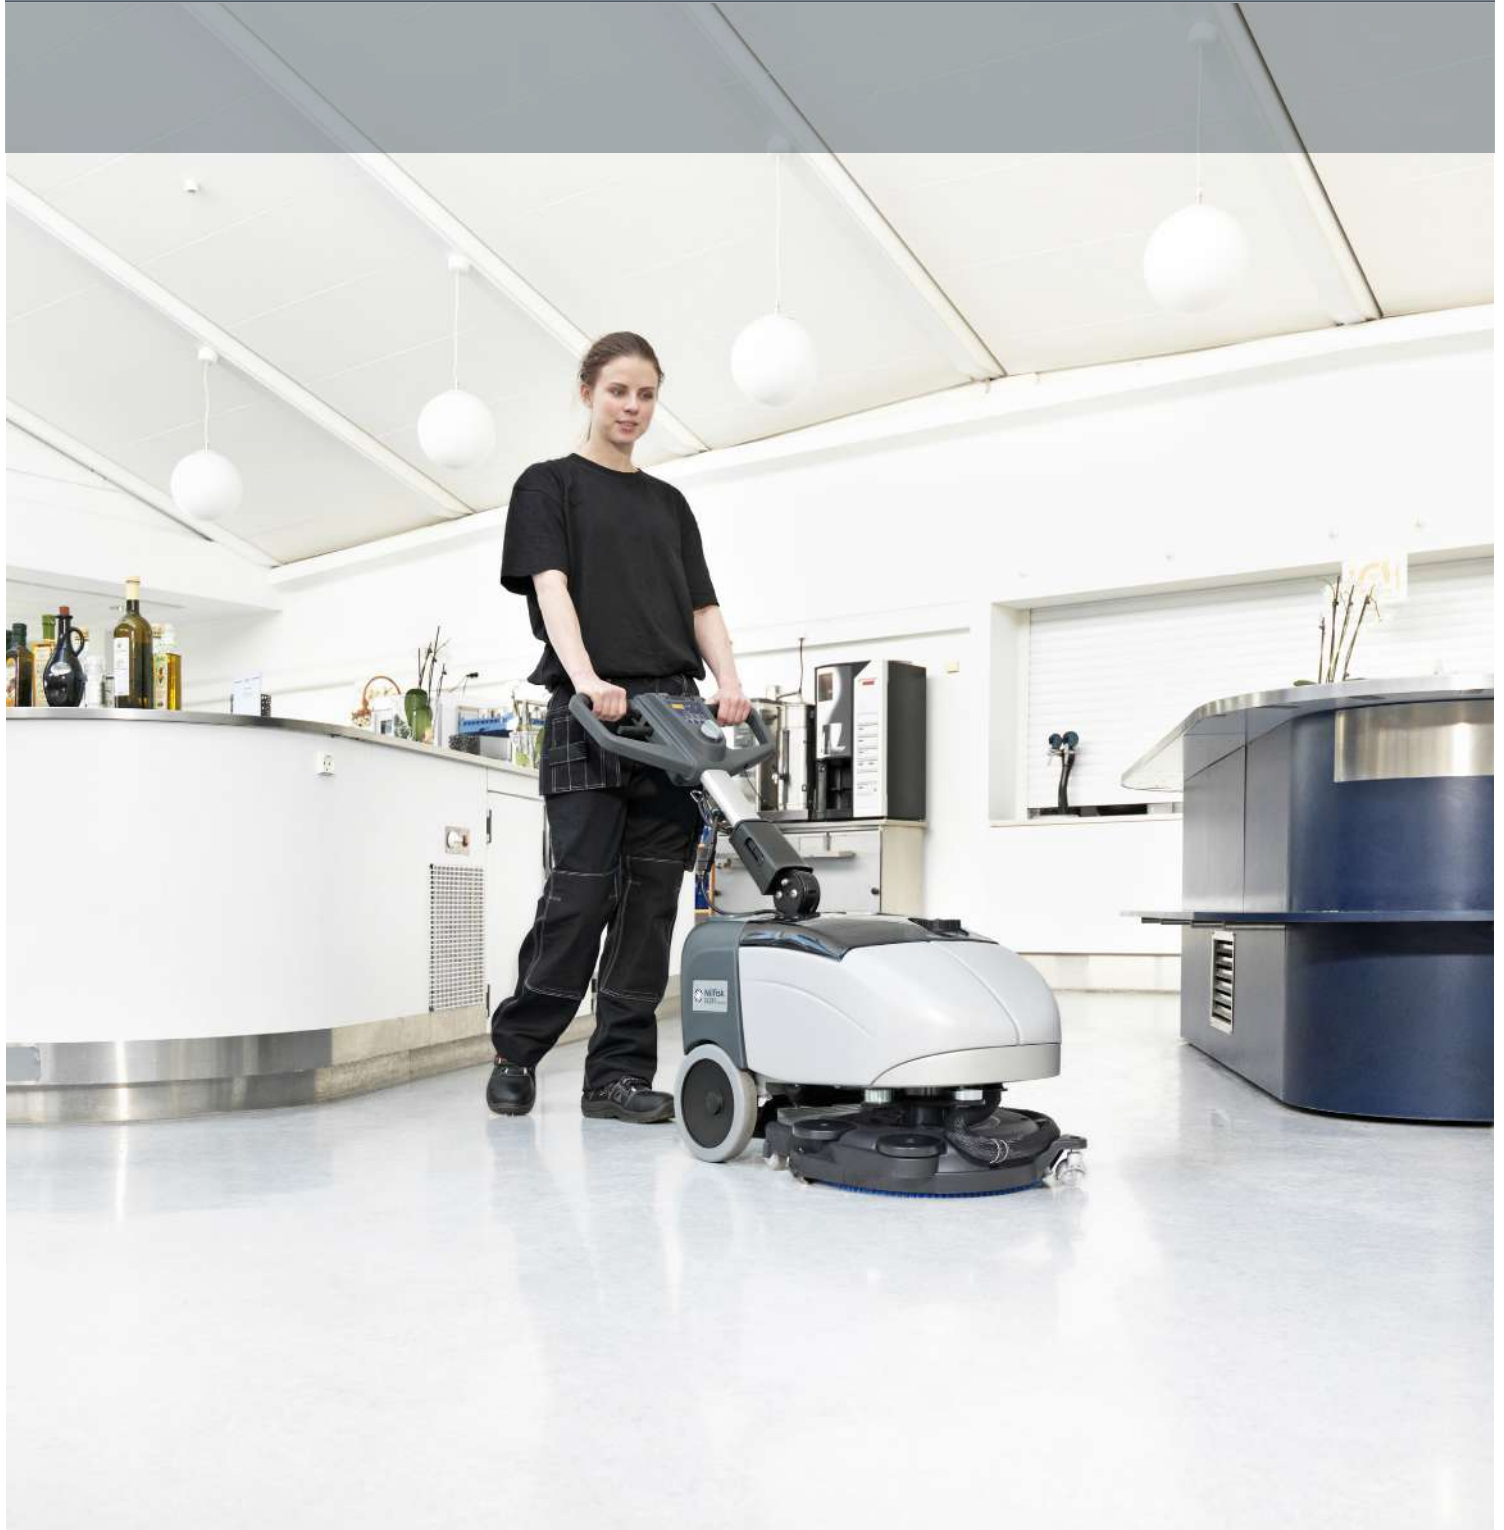

The unique rotating deck and 27 kg brush pressure enable SC351 to clean and dry both forward and backward reaching even the most inaccessible places



Low sound level allow daytime cleaning in sound sensitive areas



The powerful brush motor is designed for maximum reliability and cleaning performance

Next generation in daily small area scrubbing and drying

Easy everywhere cleaning

The SC351 is adding next generation performance to a century of Nilfisk traditions for trusted and reliable cleaning equipment.

Nilfisk SC351 is offering both forward and backward scrubbing and drying with an impressive brush pressure of 27 kg. Easy to see how useful this feature is for cleaning in crowded places, between and behind tables, shelves, furniture and in other less accessible areas. Add to that an attractive price and unmatched reliability.

Ideally suited for cleaning of hotels, schools, small shops, offices, canteens and coffee shops, SC351 is offering unique performance in a small and handy machine. Drop the mop, single disc or heavy, expensive machines and achieve remarkable results with Nilfisk SC351:

- Rotating deck enabling this compact unit to scrub and dry going either forward or backward
- 27 kg of down pressure for outstanding scrubbing effectiveness.
- Powerful brush motor to increase reliability, reduce service costs and giving superior cleaning performance
- A redesigned deck ensures reliability and increased performance with low maintenance costs
- Optima batteries available offering high productivity, constant performance, less weight and more environmental friendly with the use of less lead
- Easy brush adjustment for perfect traction control
- New squeegee system with high suction performance, and patent blade retaining system for easy removal and change of blades
- Fast and simple maintenance: All components are accessible quickly, without the need for tools
- Adjustable water flow with two optional settings.
- Brush deck with large bumper rollers and spring system for shock absorption improve reliability



Thanks to the compact design and foldable handle, the SC351 is easy to transport and store, even when space is limited



Removable two tank system with transparent plastic lid and rubber protected handles makes them easy to carry



Reliability is also our mantra when it comes to service

A Nilfisk machine functions optimally when cared for by regular service and maintenance visits. Therefore we have created the optimal service solution: three levels of service reflecting different requirements and an optional supply of a substitute machine in critical situations.

Service Solutions Standard – Professional maintenance

Your contract encompasses two yearly maintenance visits and 48 hours response time. Breakdown visits and spare parts are billed separately.

Service Solutions Plus – Optimised performance

With the Plus solution you have a firm grip on your maintenance and repair costs while knowing that your performance is never compromised, only optimised.

Service Solutions Premium – Maximised uptime

If uptime is your absolute top priority and key concern, Service Solutions Premium is the best choice. A quarterly maintenance visit is included, and there are no sudden financial surprises.



Technical specifications

Description	Unit	SC351
Voltage	V	12
Rated power	W	500
Sound pressure level at 1.5m	dB(A)	64
Productivity rate theoretical/ actual	m ² /h	1480/890
Scrubbing width	mm	370
Max speed	km/h	4
Solution/recovery tank	litre	11/11
Brush/pad diameter	mm	370
Brush pressure	kg	27
Brush speed	rpm	140
Length x width x height (machine body)	cm	73x43.5x47
Net weight	kg	44
Gross weight	kg	80
Shipping weight	kg	48
Shipping weight (full pkg)	kg	70

Specifications and details are subject to change without prior notice.

Nilfisk A/S
Kornmarksvej 1 · DK-2605 Brøndby · Denmark
Tel.: +45 43 23 81 00 · Fax: +45 43 43 77 00
mail.com@nilfisk.com
www.nilfisk.com

